

This article is an accepted version.

Please cite the published version:

[10.1016/j.apenergy.2024.125257](https://doi.org/10.1016/j.apenergy.2024.125257)

This Accepted Manuscript is distributed under the terms of the Creative Commons Attribution-NonCommercial-NoDerivatives (CC BY-NC-ND) License.

See: <https://creativecommons.org/licenses/by-nc-nd/4.0/>

Highlights

How energy strategies are shaped by the correlation of uncertainties

Antonio F. Rodriguez-Matas, Carlos Ruiz, Pedro Linares, Manuel Perez-Bravo

- First study to systematically integrate parameter correlations into strategic energy planning.
- Case study on Spain's 2030 decarbonization reveals how correlation affects strategies.
- Decarbonization strategies significantly vary with the degree of correlation.
- The correlation of fossil fuel price and renewable cost impacts renewable deployment.

How energy strategies are shaped by the correlation of uncertainties

Antonio F. Rodriguez-Matas^a, Carlos Ruiz^b, Pedro Linares^{a,c,d}, Manuel Perez-Bravo^a

^a*Instituto de Investigación Tecnológica, Universidad Pontificia Comillas, ICAI, Calle de Alberto Aguilera, 25, Madrid, 28015, Spain*

^b*Department of Statistics and UC3M-BS Institute for Financial Big Data (IFiBiD), University Carlos III of Madrid, Avenida de la Universidad, 30, Leganés, 28911, Spain*

^c*Center for Energy and Environmental Policy Research, Massachusetts Institute of Technology, E40-435 77 Massachusetts Ave., Cambridge, 02139, MA, USA*

^d*Energy Policy Research Group, University of Cambridge, Cambridge, UK*

Abstract

In the face of the global climate crisis, countries worldwide are striving for a shift in their energy systems from fossil fuels to renewable energy sources. This complex energy transition faces significant uncertainties, which must be addressed correctly to produce resilient and reliable investment strategies. This study systematically incorporates, for the first time, the correlation between uncertainties into a strategic energy planning model, in order to determine robust and consistent decarbonization strategies. Using the Spanish energy system as a real-size case study, we assess the impact of accounting for the correlations between primary energy prices and energy technology investment costs on strategic energy decisions. Our results reveal that decarbonization strategies significantly vary with the degree of correlation, and hence not accounting correctly for it may result in significant errors. When compared to the uncorrelated baseline scenario, a positive correlation results in increased fossil fuel use and reduced renewable deployment, whereas a negative correlation leads to higher renewable deployment and electrification.

Keywords: Correlation, Uncertainty, Long-term energy planning, Spain, Energy model

Introduction

In response to the global climate crisis, numerous countries have pledged to achieve climate neutrality by 2050 as outlined in their Nationally Determined Contributions (NDC). This goal requires a profound transition from fossil fuels to renewable energy sources [1]. To meet this target, decision-makers must understand energy systems dynamics and anticipate the consequences of their actions. Strategic energy planning models are crucial for this task [2].

However, the energy transition faces significant uncertainties, including the development of key decarbonization technologies [3, 4], changes in energy demand behavior [5], geopolitical instability affecting energy and material access [6], or climate change impacts [7, 8]. Accounting for these uncertainties in long-term energy planning is essential to avoid wrong decisions and potential lock-ins.

Many planning exercises have tried to address these uncertainties, through different approaches. However, most consider uncertainties as independent factors, which may result in significant errors. Relevant variables in energy planning are usually correlated, making it essential to incorporate these correlations to create coherent scenarios. A significant case is the correlation between uncertain primary energy prices and uncertain investment costs for energy technologies.

On the one hand, primary energy prices, such as natural gas and crude oil, often exhibit high positive correlations due to their substitutability and market indexation [9]. Therefore, it is important to consider scenarios where fuel prices align with their historical covariance. Ignoring these correlations may lead to incoherent pathway recommendations, such as favoring CNG and LNG as transport fuel substitutes during high petroleum prices, which is unlikely to be an optimal option since crude oil prices significantly impact natural gas prices [10].

Similarly, the investment cost of energy conversion technologies is typically correlated due to shared materials or manufacturing processes. For instance, the use of steam turbines in both combined cycle and nuclear plants mean that an increase in their production costs, driven by rising steel prices, could impact investment costs for both technologies simultaneously. Conversely, technological advancements or economies of scale could reduce costs for both. This interdependency also applies to other technologies sharing components,

materials, or manufacturing processes.

Lastly, cross-correlations between primary energy prices and investment costs of energy technologies mainly arise from the use of fossil fuels in various stages of technology production. Fossil fuels are involved in producing basic materials [11], high-temperature industrial processes [12], transporting technologies (e.g., sea transport from a Chinese factory to a photovoltaic plant site in Spain), and installation (e.g., ships and platforms for offshore wind). Including these cross-correlations provides a more comprehensive consideration of costs across supply chains, adding significant value and coherence to the analysis. Following previous examples, crude oil significantly affects natural gas prices, which in turn impacts steel production costs, affecting the investment costs for both nuclear and combined cycle plants through their reliance on steam turbines.

Thus, incorporating these correlations is crucial for capturing real market dynamics and cascading effects often ignored or treated as independent in energy planning, and hence to design consistent planning strategies.

This importance has already been recognized by several studies in the literature. For instance, Abdalla et al. [13] highlights that including correlations between uncertainties can lead to less conservative outcomes and reduced generation expansion costs. Similarly, Cao et al. [14] emphasizes that assuming independent uncertain parameters, as done in most studies, may lead to suboptimal results, underlining the need to consider correlations to ensure optimal solutions. Furthermore, Roldan et al. [15] and Wang et al. [16] also discuss the relevance of addressing correlated uncertainties in transmission network planning and the interplay between demand response and renewable energy sources, respectively. Collectively, these studies reinforce the necessity of incorporating correlations to improve the coherence and accuracy of energy planning scenarios.

Despite the importance of considering the correlation between uncertain parameters, the literature review (detailed in Appendix A¹) shows that most existing energy-related works focusing on them address single subsectors such as electricity: generation expansion planning [13, 17, 18, 19, 20], transmission network expansion planning [15, 21], demand response planning [22], and energy storage planning [14, 23]. Notably, the work from Patankar et al. [24]

¹All appendices are included in the supplementary material

represents the first and only attempt to introduce correlations in strategic energy planning across the entire energy sector. Despite the significant gap this work addresses and its excellent methodological development, it only considers the autocorrelation of uncertainties, i.e., the correlation of a single parameter with its historical values (e.g., natural gas actual price with its past prices). It does not account for correlations between different parameters (e.g., crude oil and natural gas prices) or their cross-correlations (e.g., natural gas prices and combined cycle plant investment costs). It is worth noting that there are also other types of analyses and techniques used in the energy sector to explore relationships and interactions between energy sectors. For example, Input-Output (IO) analysis is one of the techniques used, which helps in understanding economic trends and interdependencies across various industries, providing valuable insights into how sectors influence each other [25]. However, while these methods are effective for capturing relationships in sectoral dynamics, they do not directly apply to the optimization models typically used in long-term energy planning. Thus, no prior research has incorporated correlations between different uncertain parameters in a strategic energy planning model for multiple energy vectors. This gap likely exists due to the increased complexity of such optimization models and the traditional focus on minimizing computational complexity in energy planning.

Regarding the type of correlations considered in the literature, the vast majority considers uncertainties between (i) renewable generation and electricity demand [18, 19, 20, 15, 21, 22, 14, 16, 26, 27, 28]; and (ii.a) renewable generation from different plants (e.g., two PV plants in a different location) [17, 29, 30], or (ii.b) the generation of different renewable technologies (i.e. PV and wind production) [13, 23, 31]. However, correlations between fuel prices and energy technology investment costs have not been studied, despite their significant impact on the energy supply chain.

This study aims to address these gaps by analyzing the effects of incorporating correlations between primary energy prices and investment costs of energy technologies in energy planning. Uncertainties are incorporated in the model by a Robust Optimization (RO) approach. This technique is specifically designed to find optimal solutions that guarantee their feasibility for all possible realization of the uncertain parameters within an uncertainty set [32]. We focus on polyhedral uncertainty sets [33, 34] because they are versatile enough to model correlations and uncertainties among historical data,

but also because they enable the obtention of tractable deterministic counterparts. However, the most typical data-driven polyhedral uncertainty sets, either fail to capture correlations (e.g. “box” or “budget” uncertainty sets) rendering over-conservative solutions, or result in larger counterpart formulations (e.g. “convex hull” uncertainty set), which are difficult to solve. To this end, in this paper we employ the methodology proposed by Cheramin et al. [35] which proposes to reduce the dimension of the polyhedral data driven uncertainty set, and hence improving its computational performance, while keeping the maximum amount of information regarding data correlations. In particular, they propose to use Principal Component Analysis (PCA), a well established linear dimensionality reduction technique [36], that allows identifying the components of the data with that explain most of its variability. Moreover, Cheramin et al. [35] show how the level of conservatism in the robust solution can be adjusted by including more or less PCA components to define the polyhedral uncertainty set. A case study focused on the decarbonization of the Spanish energy system by 2030 [37] illustrates the impact of considering these correlations. This case study shows the applicability of this analysis to real-size countries or regions. Furthermore, it addresses an additional complexity arising from the long-term evolution of these correlations: while fossil fuel prices and energy technology investment costs may remain correlated, technological and market developments might allow for their decoupling over time. By modifying these correlations into three scenarios, the study aims to explore how the degree of correlation affects decision strategies, and the impact of fossil fuel prices on renewable energy deployment.

We summarize the key contributions of this paper as follows:

1. We apply an innovative robust optimization technique based on PCA to a strategic energy planning model, incorporating correlations between different uncertain parameters. According to the literature review, this research is the first to systematically incorporate these correlations within a strategic energy planning model that accounts for several energy vectors.
2. We present a case study focused on the decarbonization of the Spanish energy system in 2030, introducing for the first time the correlations between uncertain fuel prices and energy technology investment costs.
3. By varying the degree of these correlations, we assess the sensitivity of decisions to these correlations and evaluate their impact on the potential decoupling of fossil fuel prices from renewable energy costs.

Methods

The energy model: openMASTER

This study has been conducted within the framework of openMASTER, an open-source strategic energy planning model. This model can be used as a tool for supporting decision-making about designing public policies and investment pathways in the energy sector. It is especially useful for understanding the functioning of the energy sector as a whole, its vulnerabilities, opportunities, and trade-offs.

openMASTER is a Pyomo-based model. It operates as a dynamic (multi-stage), bottom-up, partial equilibrium, linear programming (LP) model, aiming to meet an exogenous demand for energy services across various sectors. It achieves this by adhering to technical and policy constraints while minimizing a comprehensive objective function that includes total economic costs of energy supply, social costs of greenhouse gas emissions and pollutants, and intangible costs such as discomfort of transport.

The model is built according to a scheme of processes and flows detailed in Figure 1 encompassing the entire energy sector, including primary energy import and domestic consumption, energy conversion and storage technologies for final energy production, and supply technologies to provide energy services. The energy services' exogenous demand is characterized using several parameters, including Activity Factors, Demand Characterization, and Macro Data.

The main equations of openMASTER include the objective function, balance equations, storage equations, capacity constraints, and electricity generation reliability constraints. Balance equations ensure the conservation of energy across all processes, while storage and capacity constraints ensure proper performance and operational functionality. The model also integrates constraints to ensure reliability in electricity generation and considers endogenous behavioral measures, capturing the impact of specific social measures across the energy value chain. Emissions accounting and constraints on emissions and carbon budgets further enhance the model's capability for comprehensive energy policy analysis. For a more comprehensive understanding of the openMASTER model, readers are encouraged to refer to [38].

For this study, a version of openMASTER that incorporates an algorithm based on robust optimization for handling uncertainties [39] has been used as a starting point. The model was then modified to include correlations

based on the approach by Cheramin et al. [35], as further explained in the next subsection.

A data-driven robust optimization technique for including correlations

Historically, various methodologies have been employed to address uncertainties in energy planning models. Prominent among these is scenario analysis, which constructs narratives for qualitatively studying uncertainties [40, 41, 42, 43]; stochastic programming, which assigns probabilities to different potential scenarios [44, 45, 46]; and robust optimization, which develops solutions based on worst-case scenarios, minimax regret, or least sensitivity [39, 47, 48, 49]. Each approach, despite its merits, relies on constructing representative scenarios, or uncertainty sets, to support decisions but, in general, it is not straightforward to systematically incorporate the inherent correlations between multiple uncertainties. This often results in treating uncertainties as independent phenomena or requires manual handling, such as in scenario analysis.

The literature review shows that some studies have attempted to include correlations through various methodologies. However, none have applied these methods to different parameters in long-term energy planning models, especially in the crucial case of the correlation between fuel prices and technology costs. Popular approaches include the Cholesky Decomposition [20, 27], a mathematical technique that decomposes a covariance matrix into the product of a lower triangular matrix and its transpose, allowing for the construction of a set of correlated random variables. It is mainly reserved for sensitivity analysis and statistical applications, such as Monte Carlo simulations, to explore the range of possible outcomes and assess decision robustness under different scenarios. Additionally, some works utilize Copula functions to generate a joint probability function for two uncertainties initially modeled with independent probability functions [23, 26, 28, 29, 31, 50]. This approach could be applicable in models based on Distributionally Robust Optimization [51], which extends the robust optimization approach by considering the uncertainty of a parameter's distribution function rather than its specific values. However, this technique is less suitable for dealing with epistemic uncertainties found in long-term energy planning, as these involve incomplete knowledge about the future, which traditional probabilistic methods cannot capture. Epistemic uncertainties encompass fundamental gaps in understanding the evolution of complex systems, making it difficult for past

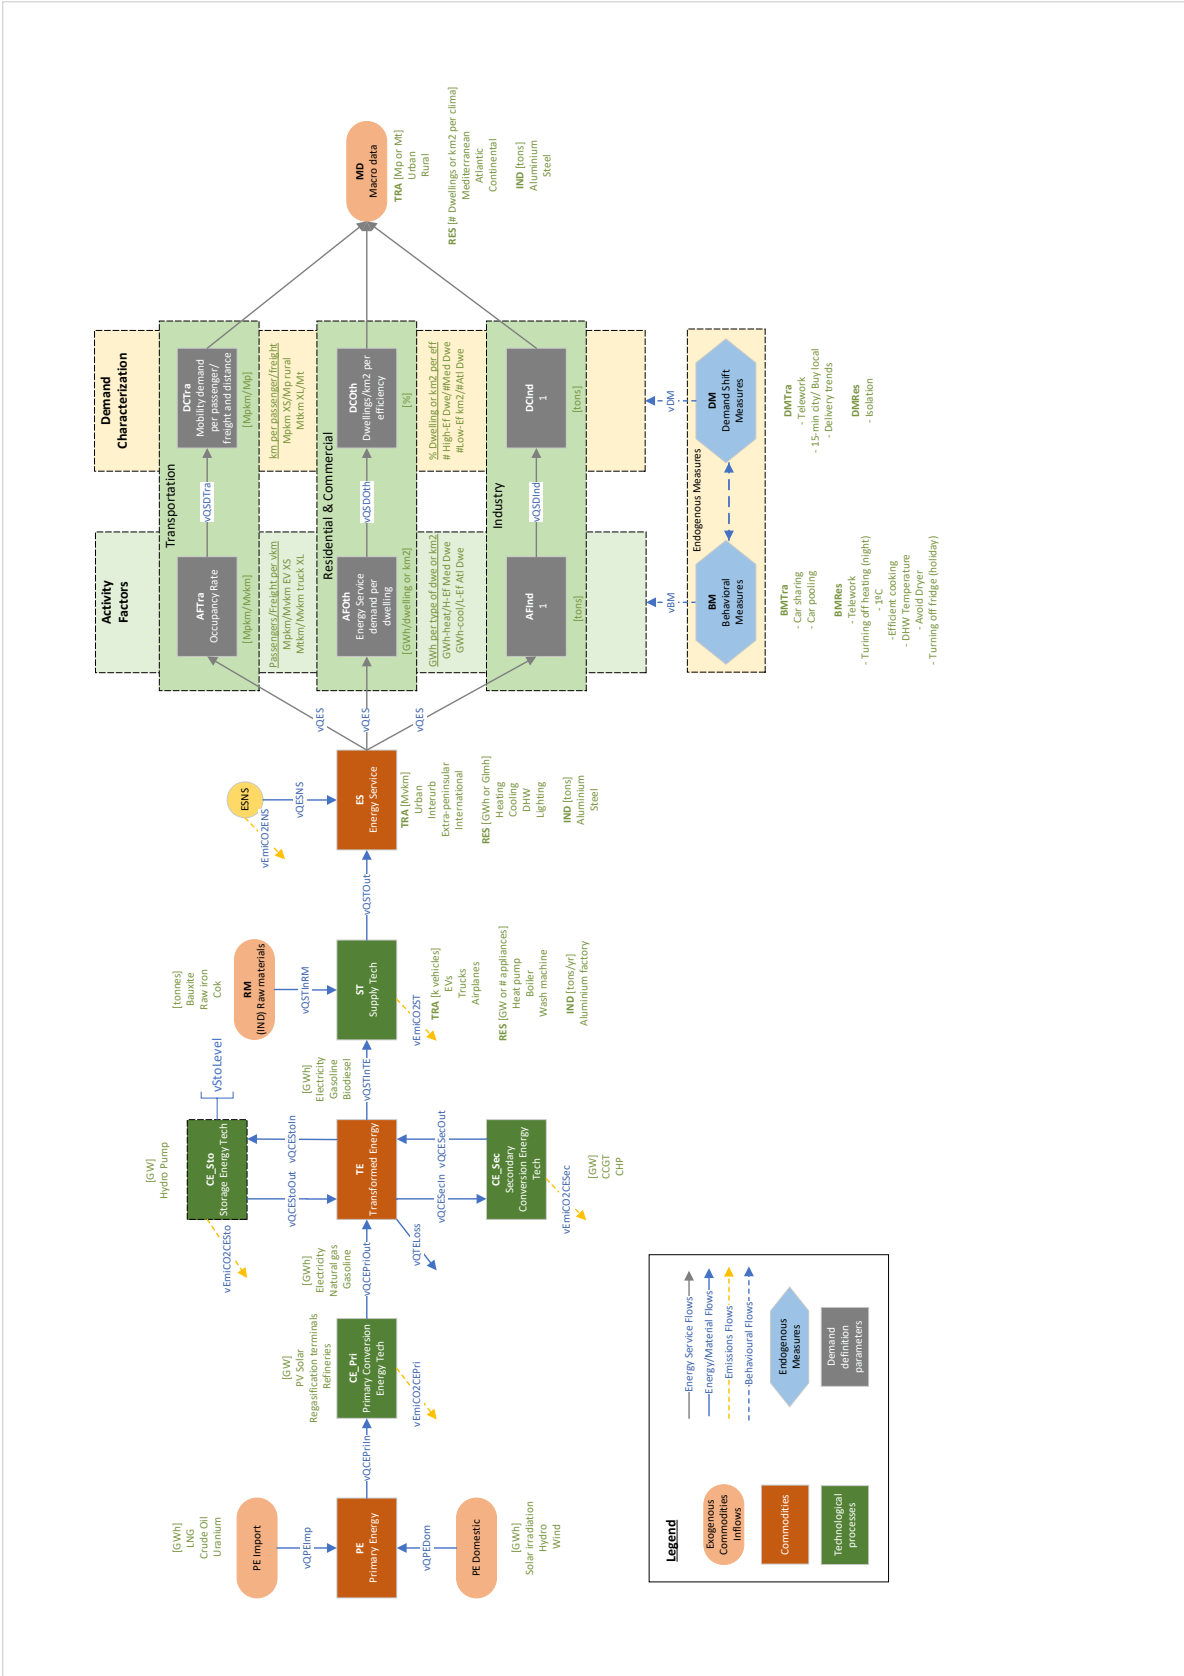


Figure 1: openMASTER core structure. To facilitate understanding, units and some examples of various processes, commodities, and flows are shown in green. Source: [38]

behaviors to represent future outcomes accurately.

Lastly, robust optimization, based on the Wald decision criterion, prepares for the most adverse scenarios. A critical requirement within this methodology is the definition of uncertainty sets, outlining the potential range of values for uncertain parameters [?]. The challenge in incorporating correlations lies precisely in the intricate design of these uncertainty sets. The first robust optimization approach, proposed by Soyster [33], relies on box uncertainty sets (refer to the black rectangle in Figure 2), which represent uncertainties within a rectangular space, resulting in overly conservative outcomes due to the limited correlation space captured. Since then, various techniques have emerged, each attempting to mitigate the conservatism associated with this methodology. One widely adopted approach, proposed by Bertsimas and Sim [34], relies on budget uncertainty sets (refer to the green lozenge in Figure 2), which introduce a control parameter to balance robustness and conservativeness, reducing the number of uncertain parameters at their worst realization, but still do not consider correlations between uncertainties. A proposal aiming to incorporate correlations involves defining convex hull uncertainty sets (refer to the red polygon in Figure 2), which represent the smallest convex set encompassing all possible scenarios, capturing correlations but at a high computational cost, making them unsuitable for real-size strategic energy models.

A novel methodology, previously unapplied to energy models, presents an opportunity to reconcile reasonable computational costs with the integration of correlations among uncertain parameters. This innovative approach, proposed by Cheramin et al. [35], is based on Principal Component Analysis (PCA). Unlike traditional robust optimization techniques based on box or budget uncertainty sets, this approach can use historical data to capture the interdependencies among uncertainties to build a more nuanced representation of the uncertainty set (refer to the blue rectangle in Figure 2). Data-driven techniques have gained increasing popularity across various fields, including energy systems, where they enable more precise decision-making under uncertainty [52, 53, 54, 55]. Therefore, PCA helps develop data-driven polyhedral uncertainty sets that address the limitations of conventional polyhedral sets by capturing the correlations and allowing direct trade-offs between tractability and conservativeness: incorporating more principal components can pose additional challenges in computational complexity, but in exchange, it yields a more robust solution.

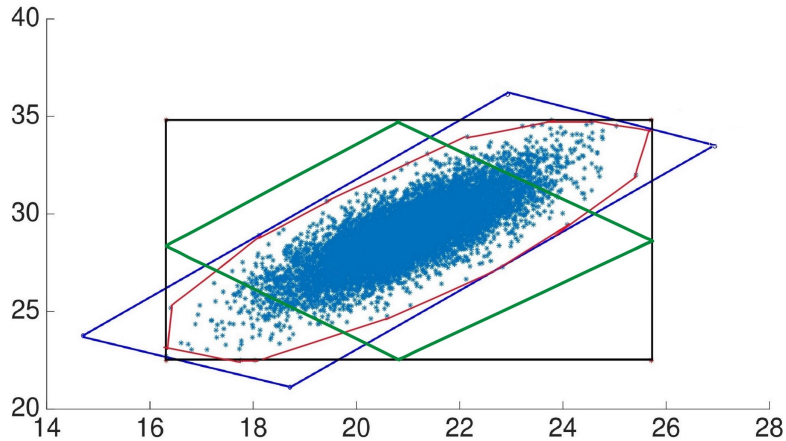


Figure 2: Definition of uncertainty sets for two correlated uncertain parameters. Black: Box [33]; Green: Budget [34]; Red: Convex hull; Blue: PCA-based uncertainty set including correlation [35]. Source:[35]

Therefore, this PCA-based technique offers the potential to design robust decisions that address uncertainties while incorporating inherent correlations and maintaining computational feasibility. However, due to its novelty, it has only been used illustratively in the original work by Cheramin et al. [35] showing simple examples of the formulation for the knapsack problem and the power grid problem. It has never been applied in a real case study analysis of investment uncertainty, or in a full-scale energy model. This study aims to bridge this gap by applying it to achieve robust decisions in strategic energy planning, aligning this methodological advance with its practical application.

Applying this method to the openMASTER model involves making the necessary modifications for its implementation. These modifications involved applying the scenario-induced uncertainty set proposed by Cheramin et al. [35]²:

²Following notation from [35], we denote scalar values by non-bold symbols, e.g., m_1 , while we represent vectors by bold symbols in the column form (e.g., $\mathbf{u} = (u_1, \dots, u_m)^\top$). Italic subscripts represent indices, e.g., c_g , while non-italic subscripts indicate simplified specifications, e.g., \mathcal{U}_{PCA} . Symbol $\|\cdot\|$ denotes the Euclidean norm. The number of uncertain parameters, i.e., the size of random variable vector, is denoted by m and $\mathbf{u} = (u_1, \dots, u_m)^\top \in \mathbb{R}^m$ represents the random variable vector. We adopt N to denote the

$$\mathcal{U}_{\text{PCA}}(\mathcal{S}, m_1) = \left\{ \mathbf{u} : \mathbf{u} = \bar{\mathbf{s}} + \sum_{i=1}^{m_1} \left(\alpha_i \left(\frac{\bar{\omega}_i}{\|\mathbf{d}_i\|} \mathbf{d}_i \right) + (1 - \alpha_i) \left(\frac{\omega_i}{\|\mathbf{d}_i\|} \mathbf{d}_i \right) \right) + \sum_{i=m_1+1}^m \frac{\bar{\omega}_i + \omega_i}{2\|\mathbf{d}_i\|} \mathbf{d}_i, 0 \leq \alpha_i \leq 1, \forall i \in [m_1] \right\},$$

where

$$\bar{\omega}_i = \max_{j=1}^N \left\{ \frac{\mathbf{s}_{j0} \cdot \mathbf{d}_i}{\|\mathbf{d}_i\|} \right\} \in \mathbb{R}, \quad \text{and} \quad \omega_i = \min_{j=1}^N \left\{ \frac{\mathbf{s}_{j0} \cdot \mathbf{d}_i}{\|\mathbf{d}_i\|} \right\} \in \mathbb{R},$$

meaning $\left(\frac{\bar{\omega}_i}{\|\mathbf{d}_i\|} \mathbf{d}_i \right)$ and $\left(\frac{\omega_i}{\|\mathbf{d}_i\|} \mathbf{d}_i \right)$ are the largest and smallest projected centered scenarios onto the principal direction \mathbf{d}_i , respectively. The sample mean $\bar{\mathbf{s}}$ is added to $\mathcal{U}_{\text{PCA}}(\mathcal{S}, m_1)$ because the scenarios have already been centered at $\bar{\mathbf{s}}$.

This uncertainty set is applied to the uncertain parameters of primary energy prices and investment costs of energy technologies. These parameters are part of the objective function. Thus, Equation 1 has been modified, representing the annual cost variable affected by these uncertainties. This annual cost variable is integrated into the objective function in the openMASTER model:

$$\begin{aligned} \mathbf{v}\text{UncCost}_y &= pYrGap \cdot \sum_{pe,s,d,h} \mathbf{p}\text{Unc}_{pe,y} \cdot (\mathbf{v}\text{QPEImp}_{pe,y,s,d,h} + \mathbf{v}\text{QPEDom}_{pe,y,s,d,h}) \\ &+ \sum_{ce} \mathbf{p}\text{Unc}_{ce,y} \cdot \mathbf{v}\text{CENewCap}_{ce,y} \end{aligned} \quad (1)$$

where $\mathbf{p}\text{Unc}$ represents both the primary energy price for the subset pe (i.e., Primary Energy) and the investment cost of energy technologies ce (i.e., Conversion Energy technologies). As these two subsets are part of the same parameter, they are indicated by subscripts in the equation. The parameter $pYrGap$ is a scalar representing the year gap for which each representative year of the model is solved, and for which operating costs, including the primary energy consumed, must be summed. In this case study, the gap used is 5 years. Regarding the variables, $\mathbf{v}\text{QPEImp}$ and $\mathbf{v}\text{QPEDom}$ are the imported and domestically consumed primary energy, respectively. The variable $\mathbf{v}\text{CENewCap}$ is the newly installed capacity of energy conversion technologies. The subscripts y , s , d , and h represent the temporal subsets

number of available scenarios for \mathbf{u} . Symbol \mathcal{S} represents the set of the N scenarios, where each scenario is denoted by $\mathbf{s}_j \in \mathbb{R}^m$, i.e., $\mathbf{s}_j \in \mathcal{S}$, $\forall j \in [N]$. The number of utilized principal components in the scenario-induced uncertainty set is indicated by m_1 .

year, season, day, and hour, respectively, given that openMASTER has been configured to work for this case study with a temporal horizon from 2020 to 2030, with four seasons and one representative day per season with 24 hours. In total, 288 time slices.

The following provides a step-by-step development of the mathematical formulation resulting from the application of the PCA-based uncertainty set (refer to Equations 3 and 4) to the uncertainties in Equation 2 of the objective function.

$$\begin{aligned} \max_{\mathbf{pUnc} \in \mathcal{U}_{pca}} pYrGap \cdot \sum_{pe,s,d,h} \mathbf{pUnc}_{pe,y} \cdot (\mathbf{vQPEImp}_{pe,y,s,d,h} + \mathbf{vQPEDom}_{pe,y,s,d,h}) \\ + \sum_{ce} \mathbf{pUnc}_{ce,y} \cdot \mathbf{vCENewCap}_{ce,y} \end{aligned} \quad (2)$$

s.t.

$$\mathbf{u}_m = \bar{\mathbf{s}}_{unc} + \sum_{m=1}^{m_1} (\alpha_m \gamma_{m,unc}^{up} + (1 - \alpha_m) \gamma_{m,unc}^{do}) + \sum_{m=m_1+1}^M \rho_{m,unc}, unc \in (pe \cup ce) \quad (3)$$

$$0 \leq \alpha_m \leq 1 \quad (4)$$

where $\gamma_{m,unc}^{up} = \left(\frac{\bar{\omega}_i}{\|\mathbf{d}_i\|} \mathbf{d}_i \right)_{unc}$ and $\gamma_{m,unc}^{do} = \left(\frac{\omega_i}{\|\mathbf{d}_i\|} \mathbf{d}_i \right)_{unc}$.

The following maximization problem is obtained by applying 3 to 2:

$$\begin{aligned} \max_{\alpha_m} pYrGap \cdot \sum_{pe,s,d,h} (\bar{\mathbf{s}}_{pe} + \sum_{m=1}^{m_1} (\alpha_m \gamma_{m,pe}^{up} + (1 - \alpha_m) \gamma_{m,pe}^{do}) + \sum_{m=m_1+1}^M \rho_{m,pe}) \cdot (\mathbf{vQPEImp}_{pe,y,s,d,h} \\ + \mathbf{vQPEDom}_{pe,y,s,d,h}) + \sum_{ce} (\bar{\mathbf{s}}_{ce} + \sum_{m=1}^{m_1} (\alpha_m \gamma_{m,ce}^{up} + (1 - \alpha_m) \gamma_{m,ce}^{do}) + \sum_{m=m_1+1}^M \rho_{m,ce}) \cdot \mathbf{vCENewCap}_{ce,y} \end{aligned} \quad (5)$$

Factoring out α_m , we obtain the following equation with only the elements that depend on this variable:

$$\begin{aligned} \max_{\alpha_m} \sum_{m=1}^{m_1} \alpha_m \cdot (pYrGap \cdot \sum_{pe,s,d,h} (\gamma_{m,pe}^{up} - \gamma_{m,pe}^{do}) \cdot (\mathbf{vQPEImp}_{pe,y,s,d,h} + \mathbf{vQPEDom}_{pe,y,s,d,h}) \\ + \sum_{ce} (\gamma_{m,ce}^{up} - \gamma_{m,ce}^{do}) \cdot \mathbf{vCENewCap}_{ce,y}) \end{aligned} \quad (6)$$

Considering the dual problem of minimizing the negative of equation 6, including constraint 4, results in:

$$\max \beta_m \quad (7)$$

s.t.

$$-\beta_m \leq -(pYrGap \cdot \sum_{pe,s,d,h} (\gamma_{m,pe}^{up} - \gamma_{m,pe}^{do}) \cdot (\mathbf{vQPEImp}_{pe,y,s,d,h} + \mathbf{vQPEDom}_{pe,y,s,d,h}) + \sum_{ce} (\gamma_{m,ce}^{up} + -\gamma_{m,ce}^{do}) \cdot \mathbf{vCENewCap}_{ce,y}) \quad (8)$$

$$\beta_m \geq 0 \quad (9)$$

Applying the Strong Duality Theorem:

$$\sum_{m=1}^{m_1} \beta_m = \sum_{m=1}^{m_1} \alpha_m \cdot (pYrGap \cdot \sum_{pe,s,d,h} (\gamma_{m,pe}^{up} - \gamma_{m,pe}^{do}) \cdot (\mathbf{vQPEImp}_{pe,y,s,d,h} + \mathbf{vQPEDom}_{pe,y,s,d,h}) + \sum_{ce} (\gamma_{m,ce}^{up} + -\gamma_{m,ce}^{do}) \cdot \mathbf{vCENewCap}_{ce,y}) \quad (10)$$

$$0 \leq \alpha_m \leq 1 \quad (11)$$

$$\beta_m \geq (pYrGap \cdot \sum_{pe,s,d,h} (\gamma_{m,pe}^{up} - \gamma_{m,pe}^{do}) \cdot (\mathbf{vQPEImp}_{pe,y,s,d,h} + \mathbf{vQPEDom}_{pe,y,s,d,h}) + \sum_{ce} (\gamma_{m,ce}^{up} + -\gamma_{m,ce}^{do}) \cdot \mathbf{vCENewCap}_{ce,y}) \quad (12)$$

Substituting into the original problem, the following equations result from applying the PCA-based uncertainty set:

$$\mathbf{vUncCost}_y = \sum_{m=1}^{m_1} \beta_m + (pYrGap \cdot \sum_{pe,s,d,h} (\bar{\mathbf{s}}_{pe} + \sum_{m=1}^{m_1} \gamma_{m,pe}^{do} + \sum_{m=m_1+1}^M \rho_{m,pe}) \cdot (\mathbf{vQPEImp}_{pe,y,s,d,h} + \mathbf{vQPEDom}_{pe,y,s,d,h}) + \sum_{ce} (\bar{\mathbf{s}}_{ce} + \sum_{m=1}^{m_1} \gamma_{m,ce}^{do} + \sum_{m=m_1+1}^M \rho_{m,ce}) \cdot \mathbf{vCENewCap}_{ce,y}) \quad (13)$$

s.t.

$$\beta_m \geq (pYrGap \cdot \sum_{pe,s,d,h} (\gamma_{m,pe}^{up} - \gamma_{m,pe}^{do}) \cdot (\mathbf{vQPEImp}_{pe,y,s,d,h} + \mathbf{vQPEDom}_{pe,y,s,d,h}) + \sum_{ce} (\gamma_{m,ce}^{up} + -\gamma_{m,ce}^{do}) \cdot \mathbf{vCENewCap}_{ce,y}) \quad (14)$$

$$\beta_m \geq 0 \quad (15)$$

Thus, Equation 13 is integrated into the objective function. Additionally, Equations 14 and 15 are constraints that have been incorporated into the model as a result of the mathematical development stemming from the application of the PCA-based uncertainty set.

Methodological procedure to apply the PCA-based uncertainty set to an energy model

The application's steps are shown in the flowchart in Figure 3. Starting with the correlated data, historical data must be collected and preprocessed in order to apply PCA, which reduces the dimensionality of the data matrix and generates the covariance matrix, eigenvectors, and eigenvalues. At this point, the number of principal components is determined to introduce the appropriate uncertainty set into the model. As mentioned earlier, the decision on the number of components allows the decision-maker to balance the trade-off between tractability and conservativeness: incorporating more principal components can increase computational complexity, but in return, it provides a more robust solution. This uncertainty set, with the selected number of principal components, is then incorporated into the energy model. In our case, which considers correlated uncertainties in the objective function, this equation is modified as detailed in the step-by-step formulation in the previous subsection. Once the results of applying this methodology are obtained, the analysis may prompt the decision-maker to consider increasing the number of principal components based on their conclusions. This process can be repeated, modifying the number of components as needed. In this way, a robust strategy is developed that not only protects against uncertainties but also accounts for the correlations between them.

It is important to note that during the data preprocessing stage, two key modifications can be applied to tailor the methodology to future trends.

First, the correlation matrix can be adjusted to reflect updated correlation levels between pairs of uncertain parameters, allowing for the incorporation of potential changes in their relationships. Second, the mean values used to construct the uncertainty set, represented by the parameter $\bar{\mathbf{s}}_{unc}$, can be updated based on projected trends, ensuring the methodology aligns with forward-looking scenarios.

Case study

The case study examines the correlations between fuel prices and investment costs in energy technologies. Although the correlations of all fuels and technologies are considered, the study places special emphasis on fossil fuels and renewable technologies, as these are modified to create scenarios based on different levels of correlation. The objective is to understand how accounting for these correlations affects decision-making and how changes in these correlations impact the deployment of renewable energy sources.

While the analysis could be applied to any country or region, it focuses on the decarbonization of the Spanish energy system, which, in our opinion, provides a very interesting setting for this analysis. Spain features a relatively large and diverse energy system, rich in renewable resources, thus helping to show the applicability of our methodology to a real national energy planning exercise, and also showing the interactions among the many different technologies that may play a role in the energy transition. This, we believe, helps in generalizing the conclusions obtained in the study to other regions. Furthermore, Spain is already undergoing an ambitious transformation of its energy system, with a large share of renewables, and so the interactions and correlations, and their impacts, are better observed compared to other countries with lower shares of these technologies.

This case study aligns with the national CO₂ emission targets for 2030 as outlined in the Spanish National Energy and Climate Plan (NECP). The base year for calibration is 2020, with detailed calibration information provided in Appendix B. As noted earlier, the data preprocessing stage allows for tailoring the methodology to future trends by updating the mean values and correlation levels. For this case study, the mean values used to construct the correlated uncertainty sets ($\bar{\mathbf{s}}_{unc}$) have been updated to reflect the expected projections of uncertainties for 2030. The number of principal components m_1 is 10.

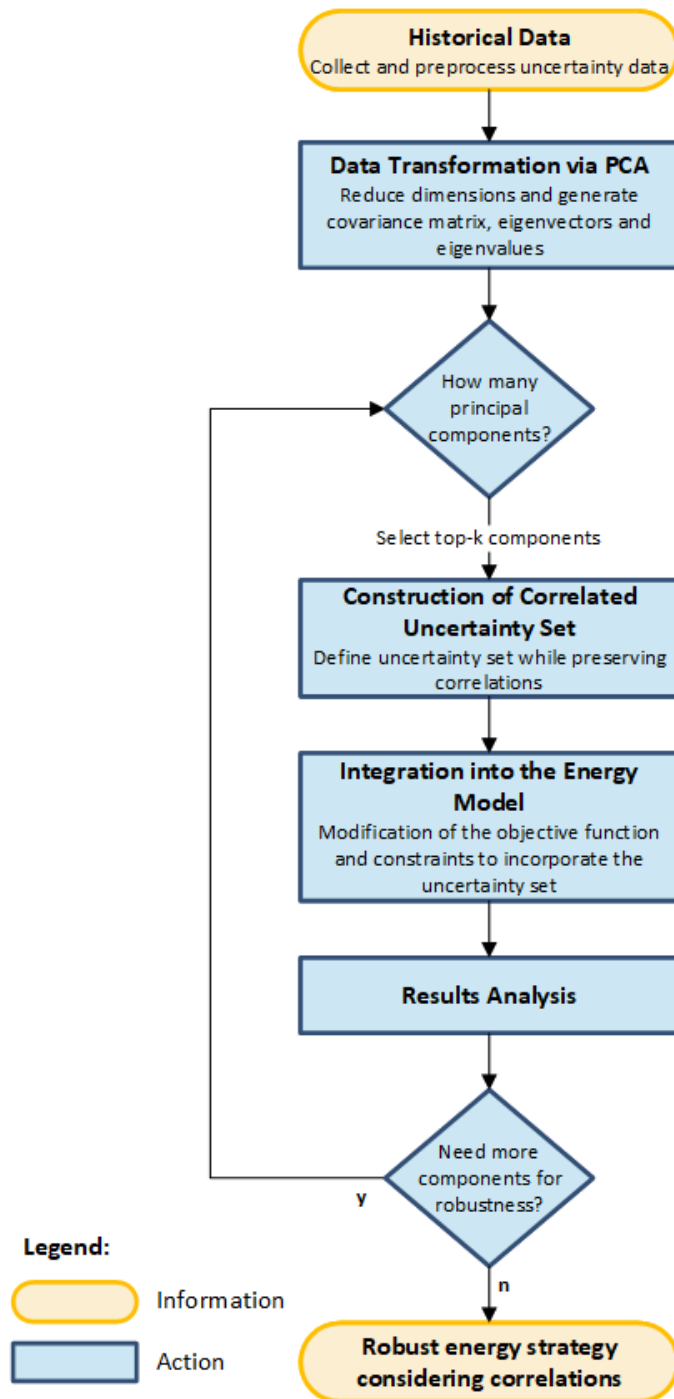


Figure 3: Flowchart illustrating the step-by-step application of PCA-based uncertainty set in an energy model

The correlation matrix has also been adjusted to explore three different scenarios, capturing varying levels of correlation between uncertain parameters and evaluating their impact on investment strategies (correlation values are provided in Appendix C):

- **Uncorrelated scenario:** This scenario uses the budget-based robust optimization technique proposed by Bertsimas and Sim [34], assuming no correlations. It serves as a baseline for comparison with other scenarios, providing a reference point to evaluate the impact of accounting for correlations.
- **Positive correlation scenario:** Historical data point to a positive correlation between primary energy prices and technology investment costs. In this scenario, this correlation is adjusted with a coefficient of 0.5. This scenario assumes that increases (or decreases) in fossil fuel prices lead to corresponding increases (or decreases) in renewable investment costs due to higher (or lower) costs associated with materials, production, transportation, and installation processes reliant on fossil fuels.
- **Negative correlation scenario:** This approach sets correlation coefficients to -0.5, indicating an inverse relationship: High (or low) fossil fuel prices accelerate (or slow down) the learning curve of renewables, reducing (or increasing) their costs and enhancing (or worsening) their competitiveness through greater (or lesser) R&D efforts.

Please note that while these scenarios offer a basic framework, real-world correlations are more nuanced, with coefficients ranging from -1 to 1. The selected correlation coefficients are designed to be representative of their corresponding scenarios and provide meaningful insights. Additionally, we ran other scenarios with different correlation levels, and the results did not show significant differences to justify their inclusion for interpreting the differences between positive, negative, and no correlation scenarios. Therefore, to facilitate the analysis and the drawing of conclusions, these additional scenarios were not included.

Therefore, these scenarios provide a comprehensive view of how different correlations can influence the deployment of renewable energy technologies for achieving the decarbonization goals of Spain by 2030.

Results

The uncorrelated scenario serves as a baseline for comparison, with results for positive and negative correlations presented against it. However, common elements across scenarios are worth analyzing, as they reveal consistent patterns and useful insights regardless of correlation assumptions.

On the one hand, Table 1 highlights a significant reliance on gas power plants across all scenarios. This dependence on fossil fuel technologies can be attributed to reduced nuclear capacity in all scenarios, falling below 2 GW, and to the firmness and adequacy constraints of the openMASTER model, which require backup for increased variable capacity from wind and solar sources. To mitigate emissions from the electric mix, Carbon Capture and Storage (CCS) technologies play a notable role in reducing emissions from gas-based technologies in all scenarios.

Regarding renewable energies, hydroelectric capacity shows minimal expansion due to geographical constraints on maximum capacity. Pumped hydro also increases marginally across all scenarios, likely due to high costs of new capacity, which reduce its competitiveness compared to gas power plants, a trend expected to continue through 2030. Additionally, all three scenarios show a clear preference for wind power over solar. This preference may stem from the better adaptation of wind power's generation profile to demand, hence reducing the need for backup.

Concerning CO₂ emissions in 2030, total emissions are nearly identical across scenarios, around 100 Mt, complying with the emission cap set, as depicted in Figure 6. However, significant differences exist in the sectoral distribution of these emissions, particularly affecting the energy generation and transportation sectors.

Under the scenario in which we assume a **positive correlation**, the strategy varies notably from the uncorrelated baseline. It exhibits higher crude oil refinery capacity and minimal biofuel refining capacity, indicating a greater reliance on oil derivatives. This is supported by higher consumption of oil derivatives and natural gas, which together account for nearly 60% of the final energy mix, as depicted in Figure 4. In contrast, the uncorrelated baseline scenario relies more on biofuels, displacing both fossil fuels and conventional electricity generation.

In the transportation sector, which accounts for the highest greenhouse gas

Conversion energy capacity [GW]	2020	2030		
		Neg	Unc	Pos
Nuclear	7.4	1.9	1.9	1.9
Coal	10.2	0	0	0
CCGT	26.6	18.8	16.4	13.1
CCGT+CCS	-	14	7.7	12.1
OCGT	-	8.7	6	9.5
OCGT+CCS	-	0	0	0
Fuel Oil	3.7	0	0	0
Hydro	14	14	14	14
Wind Onshore	26.7	90.8	67.6	75.7
Wind Offshore	-	3	3	0
Solar PV	11	40.3	30.7	18.7
Solar Th	2.3	0	0	0.6
Biomass PP	1.4	0	0	0
Pumping storage	6.4	6.5	6.5	6.5
CHP	5.5	0	0	0
TOTAL ELECT	115	198	153.7	152
Oil Refinery	28	24	24.5	26.1
Biofuel	7	4.4	14.3	0.1
Regasification	76	81.5	48.2	75.2

Table 1: Capacity of installed energy conversion technologies (GW). The heatmap colors facilitate comparison between the three scenarios (Neg: Negative correlation scenario; Unc: Uncorrelation scenario; Pos: Positive correlation scenario) by highlighting the relative capacities within each technology using an orange gradient. Abbreviations: Spanish National Energy and Climate Plan (NECP), Combined Cycle Gas Turbine (CCGT), Carbon Capture and Storage (CCS), Open Cycle Gas Turbine (OCGT), Photovoltaic (PV), Thermosolar (Th), Power Plant (PP), Combined Heat and Power (CHP), Total electricity generation capacity (TOTAL ELECT).

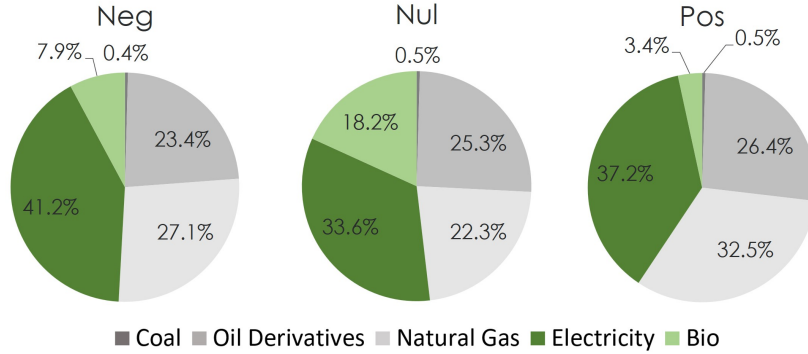


Figure 4: Final energy mix in 2030 as a percentage of total final energy consumption. Final energy vectors are aggregated into categories

Final energy [TWh]	2030		
	Neg	Unc	Pos
Coal	3.0	3.0	3.0
Fuel Oil	2.6	2.9	2.9
Diesel	101.2	112.2	109.5
Gasoline	39.6	27.4	39.2
Kerosene	11.5	13.6	12.4
LPG	1.0	1.1	1.1
Oil Others	9.5	10.4	10.2
Natural Gas	191.4	147.8	215.9
Biomass	54.7	27.4	22.2
Biofuel	1.0	93.1	0.4
Electricity	291.6	222.5	247.0

Table 2: Total annual consumption detailed for final energy vectors for 2030 (TWh). The heatmap colors facilitate comparison between the three scenarios (Neg: Negative correlation scenario; Unc: Uncorrelation scenario; Pos: Positive correlation scenario) by highlighting the relative capacities within each technology using an orange gradient. Abbreviations: Liquefied Petroleum Gas (LPG), Other petroleum derivatives (Oil Others).

emissions in Spain, the total final energy consumption indicates a strong preference for emission reduction through natural gas and electrification over biofuels, as shown in Figure 5. However, it exhibits around 10 TWh higher consumption of oil derivatives compared to the uncorrelated baseline, as well as the highest natural gas consumption, leading to the highest emissions in this sector. This underscores the greater competitiveness of fossil fuels in a scenario where the costs of renewables increase in tandem with them: EVs become more expensive to operate if the renewable electricity mix also becomes costlier, transmitting these costs and giving fossil fuels a competitive advantage. This translates directly to the car fleet, with a preference for PHEVs to electrify part of the mobility and greater use of natural gas in ICEVs. On the contrary, the reliance on biofuels in the uncorrelated baseline scenario represents a clear preference for ICEV.

Renewable energy deployment in this scenario is the lowest, with a combined wind and solar capacity of 94.4 GW, compared to 101.3 GW in the uncorrelated baseline, as observed in Table 1. Paradoxically, it accounts for the lowest emissions in the energy generation sector. This can be attributed to the electricity consumption being approximately 45 TWh lower than in the negative correlation scenario, reducing overall emissions despite a lower renewable share. Additionally, a greater share of CCS provides lower-emission electricity backup, especially important given the reduced nuclear capacity and minimal hydropower growth. This adjustment in the electricity sector compensates for higher emissions in the transportation sector, which heavily relies on fossil fuels, thus meeting the 2030 emissions target.

An interesting phenomenon when assuming a positive correlation is the absence of offshore wind, in contrast to the other two scenarios where the maximum allowed capacity of 3 GW is installed, aligned with NECP planning due to licensing constraints [37]. This can be explained by the significant correlation between offshore wind deployment and crude oil prices [56]: offshore wind and oil industries compete for vessels, oil majors' investments in offshore wind are negatively driven by the price of oil, and the price of oil influences the cost of transport fuel, steel, and copper. This, again, underscores the importance of considering correlations and their impact on decision-making.

If a **negative correlation** scenario is assumed, the investment strategy contrasts sharply with both the uncorrelated and positive correlation scenarios. It features the highest level of electrification, approaching nearly 300 TWh

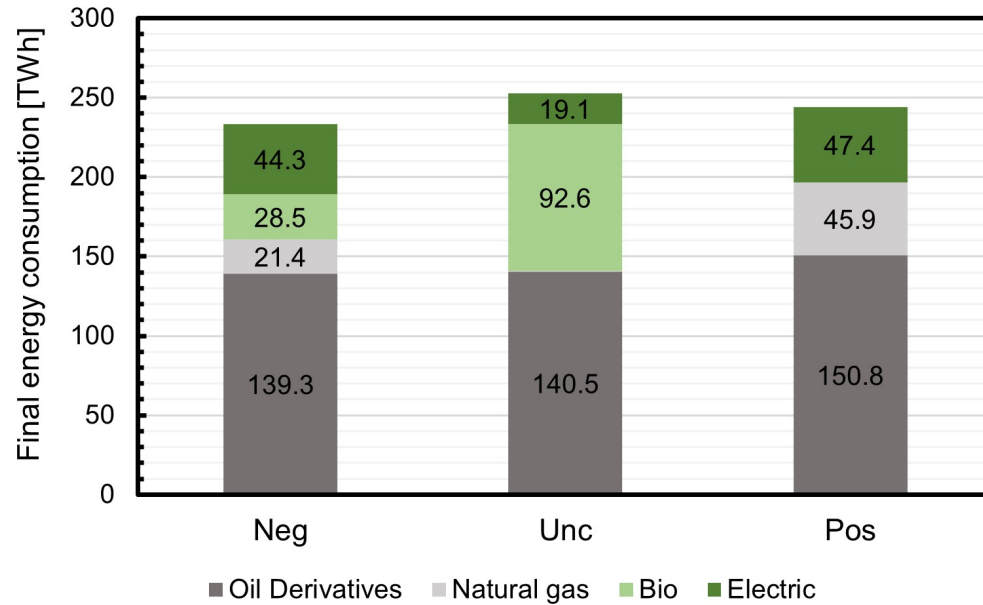


Figure 5: Annual consumption of final aggregated energy vectors in the transportation demand sector for 2030 (TWh).

Car fleet [Million vehicles]	2030		
	Neg	Unc	Pos
ICEV	11.7	18.1	11.7
PHEV	0.3	0.0	2.3
EV	5.6	0.0	3.5

Table 3: Car fleet in 2030 (Millions of Vehicles). The heatmap colors facilitate comparison between the three scenarios (Neg: Negative correlation scenario; Unc: Uncorrelation scenario; Pos: Positive correlation scenario) by highlighting the relative number of vehicles within each row using an orange gradient. Abbreviations: Internal Combustion Engine Vehicle (ICEV), Plug-In Hybrid Electric Vehicle (PHEV), Electric Vehicle (EV).

annually, as observed in Table 2. This electrification strategy is strongly complemented by the highest deployment of wind and solar at 134.1 GW aggregated, marking a nearly 40 GW difference compared to the other scenarios, as presented in Table 1. However, higher capacity in combined cycle gas turbines enhances firm capacity and supports increased variable installed capacity, resulting in the highest total installed capacity in the electricity sector among the scenarios. This is consistent with the greater electrification of demand in this scenario. Nevertheless, this scenario exhibits the highest emissions in the energy generation sector, primarily due to the lower capacity of CCS for backup and significantly higher electricity consumption: despite having the largest share of renewables in the electricity mix, it is not enough to offset the increased generation.

This electrification, when assuming this negative correlation scenario, primarily occurs in the transportation sector, resulting in a more diversified mix of energy vectors. Specifically, natural gas and biofuels, though less prevalent than in other scenarios, play significant roles. The car fleet predominantly favors EVs over PHEVs. Additionally, ICEVs increase the use of natural gas and biofuels, which is consistent with the overall energy consumption patterns of the transportation sector.

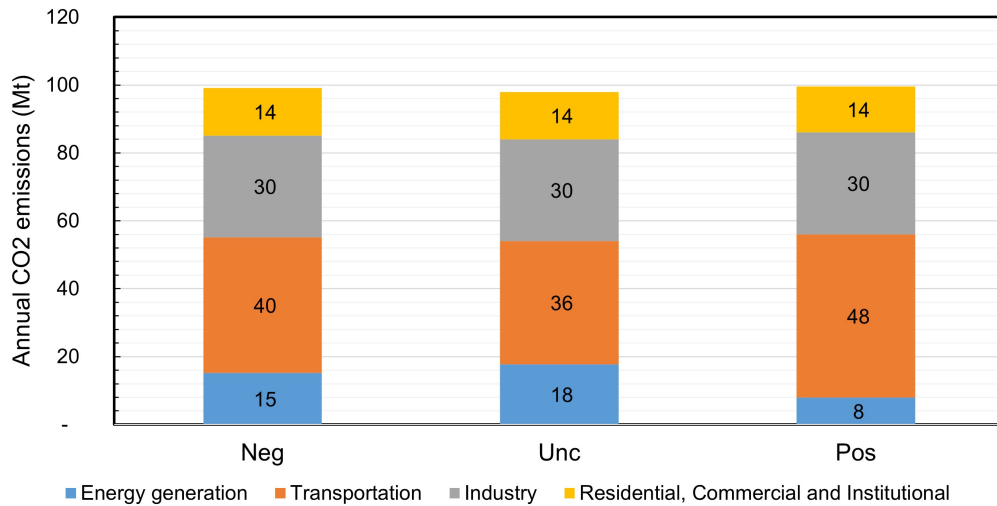


Figure 6: Annual sectorial CO2 emissions for 2030 (Mt).

Conclusions and future work

This study is the first to incorporate correlations between uncertain parameters into a strategic energy planning model. Using a novel PCA-based methodology, correlations between fuel prices and energy technology investment costs are examined in a case study on the decarbonization of the Spanish energy system, aligned with the 2030 CO₂ emission reduction targets. By developing scenarios with varying levels of correlation between fossil fuel prices and renewable energy costs, the impact on decision-making processes and the deployment of renewable energy technologies is assessed.

The case study results reveal that decarbonization strategies vary significantly with the level of correlation. When assuming an uncorrelated scenario, a key finding is that greater decarbonization in the transportation sector is achieved by heavily investing in biofuels rather than electrification. This outcome can largely be attributed to vehicle fleet inertia, where only vehicles at the end of their life cycle are replaced. Consequently, while electric vehicle adoption is slow by 2030, the existing ICEV fleet can still reduce emissions through biofuels. This underscores the potential role of biofuels in the transitional decarbonization of transportation as EVs gradually replace ICEVs under this assumption.

If the correlation between fossil fuel prices and renewable energy costs is positive, and beyond initial adoption barriers of EVs, such as investment cost, home-based charging, and vehicle range, higher renewable electricity costs make EV operation more expensive, hindering this transition. This finding could be transferable to other electrifiable demands, such as those using heat pumps or electrified industrial processes, which are key contributors to emissions reduction. A particularly sensible technology in this regard is offshore wind energy, which is deeply linked with the fossil fuel industry, and hence subject to its fluctuations.

Our results have significant policy implications for the energy transition. First, it shows the relevance of including these correlations into energy planning and the design of transition strategies. Policymakers, when deciding upon decarbonization strategies, should take into account the correlation between uncertain parameters in order to produce robust and consistent pathways. The energy mix changes markedly across scenarios, suggesting that strategies based on wrong correlation assumptions may lead to inefficient investments and potential lock-ins. Therefore, introducing correlations into

energy planning, and accurately understanding the expected sign and value of those correlations, is crucial to produce robust and consistent strategies and to minimize costly mistakes.

Second, policymakers should deploy policies that may help in decoupling unwanted correlations. For example, decoupling renewable energy costs and fossil fuel prices can be done by investing in R&D to reduce the dependence of renewable energy technologies on fossil fuels (e.g., by developing green steel or concrete). Promoting a circular economy for materials can also help achieve the same goal.

Additionally, faster green electrification of the production processes through which transition technologies (renewables, batteries, etc.) are produced can also help decouple their costs from fossil fuel prices. This electrification should then be given priority in the decarbonization of industry. Another policy that would help reduce the unwanted impacts of correlations would be to use alternative fuels, not that dependent on fossil fuels for their manufacturing: biofuels may play an important role in making decarbonization strategies more robust in the presence of uncertain correlations.

Third, our results show that a positive correlation between fossil fuel prices and renewable energy costs makes it more difficult to electrify transportation, residential, or industrial demands. Therefore, support policies may be needed to address this reduced competitiveness (unless this positive correlation has been minimized through other policies, as mentioned above). This may call for a larger use of carbon pricing (which separates further the fossil fuel price and renewable energy cost), or for stronger support systems for low-carbon technologies (such as subsidies for electric vehicles or renewable energy generation).

In this regard, it is worth noting that carbon prices, when determined in emissions markets, are typically set by fossil fuel prices (typically the opportunity cost of shifting to natural gas). Therefore, there is also a correlation between fossil fuel prices and carbon prices in markets, which must be taken into account, and which generally goes against the original sign of the correlation. Emissions markets can, therefore, play an interesting role as "mitigators" of the correlations analyzed in the study.

Finally, the existence of a correlation (positive or negative) between fossil fuel prices and renewable energy costs should be accounted for by designing support systems for renewables which are indexed to fossil fuel prices, as has

already been done in some countries (e.g. Germany).

Moreover, this methodology has potential applications beyond the energy sector and can be extended to explore interdependencies in other contexts. For instance, the approach could be adapted to assess correlations in sectors such as water or agriculture, where similar dynamics of resource dependencies exist [57]. Additionally, it could support integrated planning across interdependent systems, such as those with water-energy-food, by capturing cross-sectoral correlations. From a regional perspective, the methodology can provide insights into localized correlation dynamics, informing tailored policies for regions with distinct economic structures, resource dependencies, or decarbonization challenges.

Despite its contributions, the study has limitations that suggest directions for future research. The methodology considers the level of correlation during the data preprocessing phase, using these correlations to generate the necessary parameters, such as eigenvalues and eigenvectors, for constructing the uncertainty set. Consequently, modifying the level of correlation dynamically over time is not directly feasible within the current optimization framework. However, a potential avenue for future research could involve combining this methodology with adaptive optimization techniques. For example, implementing a rolling horizon approach could enable the consecutive optimization of subperiods, where the uncertainty set would be updated to reflect varying levels of correlation over time. Although it would represent a challenge both computationally and methodologically, this could provide a more flexible framework for addressing evolving trends driven by market transformations, policy shifts, and technological innovation, particularly in analyses that extend toward long-term horizons. Furthermore, future work could also explore correlations and interdependencies beyond fuel prices and technology costs, expanding the applicability of the methodology to capture broader interdependencies.

Data availability

The data used for this study are available in Appendices B and C of the supplementary material.

Code availability

The open-source code for the openMASTER model is available at <https://github.com/IIT-EnergySystemModels/openMASTER>. Further information related to the open-

MASTER model, data and assumptions is available in [38].

Acknowledgments

C. Ruiz gratefully acknowledge the financial support from MCIN/AEI/10.13039/501100011033, project PID2020-116694GB-I00. A. F. Rodriguez-Matas, M. Perez-Bravo and P. Linares' work has been supported in part by grant PID2022-136376OB-I00 funded by MCIN/ AEI /10.13039/501100011033/

References

- [1] P. R. Shukla, J. Skea, R. Slade, A. Al Khourdajie, R. van Diemen, D. McCollum, M. Pathak, S. Some, P. Vyas, R. Fradera, M. Belkacemi, A. Hasija, G. Lisboa, S. Luz, J. Malley (Eds.), *Climate Change 2022: Impacts, Adaptation and Vulnerability. Contribution of Working Group III to the Sixth Assessment Report of the Intergovernmental Panel on Climate Change.*, 2022. doi:10.1017/9781009157926.
- [2] A. Gambhir, *Planning a Low-Carbon Energy Transition: What Can and Can't the Models Tell Us?*, *Joule* 3 (2019) 1795–1798. URL: <https://www.sciencedirect.com/science/article/pii/S2542435119303605>. doi:10.1016/j.joule.2019.07.016.
- [3] B. Probst, S. Touboul, M. Glachant, A. Dechezleprêtre, *Global trends in the invention and diffusion of climate change mitigation technologies*, *Nature Energy* 6 (2021) 1077–1086. URL: <https://www.nature.com/articles/s41560-021-00931-5>. doi:10.1038/s41560-021-00931-5, publisher: Nature Publishing Group.
- [4] R. Way, M. C. Ives, P. Mealy, J. D. Farmer, *Empirically grounded technology forecasts and the energy transition*, *Joule* 6 (2022) 2057–2082. URL: <https://www.sciencedirect.com/science/article/pii/S254243512200410X>. doi:10.1016/j.joule.2022.08.009.
- [5] J. Barrett, S. Pye, S. Betts-Davies, O. Broad, J. Price, N. Eyre, J. Anable, C. Brand, G. Bennett, R. Carr-Whitworth, A. Garvey, J. Giesekam, G. Marsden, J. Norman, T. Oreszczyn, P. Ruyssevelt, K. Scott, *Energy demand reduction options for meeting national zero-emission targets*

- in the United Kingdom, *Nature Energy* 7 (2022) 726–735. URL: <https://www.nature.com/articles/s41560-022-01057-y>. doi:10.1038/s41560-022-01057-y, publisher: Nature Publishing Group.
- [6] O. Ruhnau, C. Stiewe, J. Muessel, L. Hirth, Natural gas savings in Germany during the 2022 energy crisis, *Nature Energy* 8 (2023) 621–628. URL: <https://www.nature.com/articles/s41560-023-01260-5>. doi:10.1038/s41560-023-01260-5, publisher: Nature Publishing Group.
- [7] S. G. Yalaw, M. T. H. van Vliet, D. E. H. J. Gernaat, F. Ludwig, A. Mirara, C. Park, E. Byers, E. De Cian, F. Piontek, G. Iyer, I. Mouratiadou, J. Glynn, M. Hejazi, O. Dessens, P. Rochedo, R. Pietzcker, R. Schaeffer, S. Fujimori, S. Dasgupta, S. Mima, S. R. S. da Silva, V. Chaturvedi, R. Vautard, D. P. van Vuuren, Impacts of climate change on energy systems in global and regional scenarios, *Nature Energy* 5 (2020) 794–802. URL: <https://www.nature.com/articles/s41560-020-0664-z>. doi:10.1038/s41560-020-0664-z, publisher: Nature Publishing Group.
- [8] M. T. Craig, J. Wohland, L. P. Stoop, A. Kies, B. Pickering, H. C. Bloomfield, J. Browell, M. De Felice, C. J. Dent, A. Deroubaix, F. Frischmuth, P. L. M. Gonzalez, A. Grochowicz, K. Gruber, P. Härtel, M. Kittel, L. Kotzur, I. Labuhn, J. K. Lundquist, N. Pflugradt, K. van der Wiel, M. Zeyringer, D. J. Brayshaw, Overcoming the disconnect between energy system and climate modeling, *Joule* 6 (2022) 1405–1417. URL: <https://www.sciencedirect.com/science/article/pii/S2542435122002379>. doi:10.1016/j.joule.2022.05.010.
- [9] D. Zhang, T. Wang, X. Shi, J. Liu, Is hub-based pricing a better choice than oil indexation for natural gas? Evidence from a multiple bubble test, *Energy Economics* 76 (2018) 495–503. URL: <https://www.sciencedirect.com/science/article/pii/S0140988318304419>. doi:10.1016/j.eneco.2018.11.001.
- [10] W. Mensi, M. U. Rehman, X. V. Vo, Dynamic frequency relationships and volatility spillovers in natural gas, crude oil, gas oil, gasoline, and heating oil markets: Implications for portfolio management, *Resources Policy* 73 (2021) 102172. URL: <https://www.sciencedirect.com/science/article/pii/S0301420721001860>. doi:10.1016/j.resourpol.2021.102172.

- [11] T. Gerres, Understanding the implications of industrial decarbonization: a multidisciplinary approach towards the transition of the basic materials industry and its impact on our energy systems, <http://purl.org/dc/dcmitype/Text>, Universidad Pontificia Comillas, 2022. URL: <https://dialnet.unirioja.es/servlet/tesis?codigo=303028>, pages: 1.
- [12] A. Gailani, S. Cooper, S. Allen, A. Pimm, P. Taylor, R. Gross, Assessing the potential of decarbonization options for industrial sectors, *Joule* 8 (2024) 576–603. URL: <https://www.sciencedirect.com/science/article/pii/S2542435124000266>. doi:10.1016/j.joule.2024.01.007.
- [13] O. H. Abdalla, M. A. Abu Adma, A. S. Ahmed, Generation expansion planning under correlated uncertainty of mass penetration renewable energy sources, *IET Energy Systems Integration* 2 (2020) 273–281. URL: <https://onlinelibrary.wiley.com/doi/abs/10.1049/iet-esi.2020.0008>. doi:10.1049/iet-esi.2020.0008, eprint: <https://onlinelibrary.wiley.com/doi/pdf/10.1049/iet-esi.2020.0008>.
- [14] M. Cao, Q. Xu, J. Cai, B. Yang, Optimal sizing strategy for energy storage system considering correlated forecast uncertainties of dispatchable resources, *International Journal of Electrical Power & Energy Systems* 108 (2019) 336–346. URL: <https://www.sciencedirect.com/science/article/pii/S0142061518324773>. doi:10.1016/j.ijepes.2019.01.019.
- [15] C. Roldan, R. Mínguez, R. García-Bertrand, J. M. Arroyo, Robust Transmission Network Expansion Planning Under Correlated Uncertainty, *IEEE Transactions on Power Systems* 34 (2019) 2071–2082. doi:10.1109/TPWRS.2018.2889032, conference Name: IEEE Transactions on Power Systems.
- [16] W. Wang, H. Dong, Y. Luo, C. Zhang, B. Zeng, F. Xu, M. Zeng, An Interval Optimization-Based Approach for Electric–Heat–Gas Coupled Energy System Planning Considering the Correlation between Uncertainties, *Energies* 14 (2021) 2457. URL: <https://www.mdpi.com/1996-1073/14/9/2457>.

doi:10.3390/en14092457, number: 9 Publisher: Multidisciplinary Digital Publishing Institute.

- [17] O. H. Abdalla, L. Smieeee, M. A. A. Adma, A. S. Ahmed, Two-stage robust generation expansion planning considering long- and short-term uncertainties of high share wind energy, *Electric Power Systems Research* 189 (2020) 106618. URL: <https://www.sciencedirect.com/science/article/pii/S0378779620304223>. doi:10.1016/j.epsr.2020.106618.
- [18] S. Dehghan, N. Amjady, A. J. Conejo, Reliability-Constrained Robust Power System Expansion Planning, *IEEE Transactions on Power Systems* 31 (2016) 2383–2392. doi:10.1109/TPWRS.2015.2464274, conference Name: IEEE Transactions on Power Systems.
- [19] Y. Lei, D. Wang, H. Jia, J. Chen, J. Li, Y. Song, J. Li, Multi-objective stochastic expansion planning based on multi-dimensional correlation scenario generation method for regional integrated energy system integrated renewable energy, *Applied Energy* 276 (2020) 115395. URL: <https://www.sciencedirect.com/science/article/pii/S0306261920309077>. doi:10.1016/j.apenergy.2020.115395.
- [20] K. Saxena, R. Bhakar, P. Jain, Coordinated GEP and TEP Approach with Correlated Generation and Load, in: 2018 3rd International Conference and Workshops on Recent Advances and Innovations in Engineering (ICRAIE), 2018, pp. 1–6. doi:10.1109/ICRAIE.2018.8710415.
- [21] S. Zhang, H. Cheng, K. Li, N. Tai, D. Wang, F. Li, Multi-objective distributed generation planning in distribution network considering correlations among uncertainties, *Applied Energy* 226 (2018) 743–755. URL: <https://www.sciencedirect.com/science/article/pii/S030626191830919X>. doi:10.1016/j.apenergy.2018.06.049.
- [22] B. Zeng, Y. Liu, F. Xu, Y. Liu, X. Sun, X. Ye, Optimal demand response resource exploitation for efficient accommodation of renewable energy sources in multi-energy systems considering correlated uncertainties, *Journal of Cleaner Production* 288 (2021) 125666. URL: <https://www.sciencedirect.com/science/article/pii/S0959652620357127>. doi:10.1016/j.jclepro.2020.125666.

- [23] Q. Wang, X. Zhan, C. Yi, Z. Li, D. Xu, A Novel Shared Energy Storage Planning Method Considering the Correlation of Renewable Uncertainties on the Supply Side, *IEEE Transactions on Sustainable Energy* (2022) 1–1. doi:10.1109/TSTE.2022.3179837, conference Name: *IEEE Transactions on Sustainable Energy*.
- [24] N. Patankar, H. Eshraghi, A. R. de Queiroz, J. F. DeCarolis, Using robust optimization to inform US deep decarbonization planning, *Energy Strategy Reviews* 42 (2022) 100892. URL: <https://www.sciencedirect.com/science/article/pii/S2211467X22000888>. doi:10.1016/j.esr.2022.100892.
- [25] W.-L. Shang, Y. Ling, W. Ochieng, L. Yang, X. Gao, Q. Ren, Y. Chen, M. Cao, Driving forces of CO₂ emissions from the transport, storage and postal sectors: A pathway to achieving carbon neutrality, *Applied Energy* 365 (2024) 123226. URL: <https://www.sciencedirect.com/science/article/pii/S0306261924006093>. doi:10.1016/j.apenergy.2024.123226.
- [26] Y. Fu, Q. Sun, R. Wennersten, The effect of correlation of uncertainties on collaborative optimization of integrated energy system, *Energy Reports* 7 (2021) 586–592. URL: <https://www.sciencedirect.com/science/article/pii/S235248472100593X>. doi:10.1016/j.egyr.2021.07.130.
- [27] H. Yu, W. Tian, J. Yan, P. Li, K. Zhao, F. Wallin, C. Wang, Improved triangle splitting based bi-objective optimization for community integrated energy systems with correlated uncertainties, *Sustainable Energy Technologies and Assessments* 49 (2022) 101682. URL: <https://www.sciencedirect.com/science/article/pii/S2213138821006962>. doi:10.1016/j.seta.2021.101682.
- [28] L. Yu, Y. Xiao, S. Jiang, Y. P. Li, Y. R. Fan, G. H. Huang, J. Lv, Q. T. Zuo, F. Q. Wang, A copula-based fuzzy interval-random programming approach for planning water-energy nexus system under uncertainty, *Energy* 196 (2020) 117063. URL: <https://www.sciencedirect.com/science/article/pii/S0360544220301705>. doi:10.1016/j.energy.2020.117063.

- [29] Y. Qiu, Q. Li, Y. Pan, H. Yang, W. Chen, A scenario generation method based on the mixture vine copula and its application in the power system with wind/hydrogen production, *International Journal of Hydrogen Energy* 44 (2019) 5162–5170. URL: <https://www.sciencedirect.com/science/article/pii/S0360319918330994>. doi:10.1016/j.ijhydene.2018.09.179.
- [30] X. Xu, Z. Yan, M. Shahidehpour, Z. Li, M. Yan, X. Kong, Data-Driven Risk-Averse Two-Stage Optimal Stochastic Scheduling of Energy and Reserve With Correlated Wind Power, *IEEE Transactions on Sustainable Energy* 11 (2020) 436–447. doi:10.1109/TSTE.2019.2894693, conference Name: IEEE Transactions on Sustainable Energy.
- [31] Y. Zhu, Q. Tong, X. Yan, Y. Liu, J. Zhang, Y. Li, G. Huang, Optimal design of multi-energy complementary power generation system considering fossil energy scarcity coefficient under uncertainty, *Journal of Cleaner Production* 274 (2020) 122732. URL: <https://www.sciencedirect.com/science/article/pii/S0959652620327797>. doi:10.1016/j.jclepro.2020.122732.
- [32] A. Ben-Tal, T. And, A. Nemirovski, Robust Convex Optimization, *Mathematics of Operations Research - MOR* 23 (1998). doi:10.1287/moor.23.4.769.
- [33] A. L. Soyster, Technical Note—Convex Programming with Set-Inclusive Constraints and Applications to Inexact Linear Programming, *Operations Research* 21 (1973) 1154–1157. URL: <http://pubsonline.informs.org/doi/abs/10.1287/opre.21.5.1154>. doi:10.1287/opre.21.5.1154.
- [34] D. Bertsimas, M. Sim, The Price of Robustness, *Operations Research* 52 (2004) 35–53. URL: <http://pubsonline.informs.org/doi/abs/10.1287/opre.1030.0065>. doi:10.1287/opre.1030.0065.
- [35] M. Cheramin, R. L.-Y. Chen, J. Cheng, A. Pinar, Data-Driven Robust Optimization Using Scenario-Induced Uncertainty Sets, 2021. URL: <http://arxiv.org/abs/2107.04977>. doi:10.48550/arXiv.2107.04977, arXiv:2107.04977 [math].

- [36] S. Wold, K. Esbensen, P. Geladi, Principal component analysis, *Chemometrics and Intelligent Laboratory Systems* 2 (1987) 37–52. URL: <https://www.sciencedirect.com/science/article/pii/0169743987800849>. doi:10.1016/0169-7439(87)80084-9.
- [37] Gobierno de España, Plan Nacional Integrado de Energía y Clima (PNIEC), Technical Report, 2021.
- [38] A. F. Rodríguez-Matas, M. Pérez-Bravo, P. Linares, J. C. Romero, openMASTER: The open source Model for the Analysis of Sustainable Energy Roadmaps, *Energy Strategy Reviews* 54 (2024) 101456. URL: <https://www.sciencedirect.com/science/article/pii/S2211467X24001639>. doi:10.1016/j.esr.2024.101456.
- [39] A. F. Rodríguez-Matas, P. Linares, M. Pérez-Bravo, J. C. Romero, Improving robustness in strategic energy planning: A novel decision support method to deal with epistemic uncertainties, *Energy* (2024) 130463. URL: <https://www.sciencedirect.com/science/article/pii/S0360544224002342>. doi:10.1016/j.energy.2024.130463.
- [40] A. Aghahosseini, A. A. Solomon, C. Breyer, T. Pregger, S. Simon, P. Strachan, A. Jäger-Waldau, Energy system transition pathways to meet the global electricity demand for ambitious climate targets and cost competitiveness, *Applied Energy* 331 (2023) 120401. URL: <https://www.sciencedirect.com/science/article/pii/S0306261922016580>. doi:10.1016/j.apenergy.2022.120401.
- [41] F. Gracceva, P. Zeniewski, Exploring the uncertainty around potential shale gas development – A global energy system analysis based on TIAM (TIMES Integrated Assessment Model), *Energy* 57 (2013) 443–457. URL: <https://www.sciencedirect.com/science/article/pii/S0360544213005045>. doi:10.1016/j.energy.2013.06.006.
- [42] K. Hansen, B. V. Mathiesen, I. R. Skov, Full energy system transition towards 100% renewable energy in Germany in 2050, *Renewable and Sustainable Energy Reviews* 102 (2019) 1–13. URL: <https://www.sciencedirect.com/science/article/pii/S1364032118307913>. doi:10.1016/j.rser.2018.11.038.

- [43] A. Lopez-Pena Fernandez, Evaluation and design of sustainable energy policies: an application to the case of Spain, 2014. URL: <https://repositorio.comillas.edu/xmlui/handle/11531/50940>.
- [44] Y.-H. Huang, J.-H. Wu, Y.-J. Hsu, Two-stage stochastic programming model for the regional-scale electricity planning under demand uncertainty, *Energy* 116 (2016) 1145–1157. URL: <http://www.sciencedirect.com/science/article/pii/S0360544216313846>. doi:10.1016/j.energy.2016.09.112.
- [45] R. Loulou, M. Labriet, A. Kanudia, Deterministic and stochastic analysis of alternative climate targets under differentiated cooperation regimes, *Energy Economics* 31 (2009) S131–S143. URL: <http://www.sciencedirect.com/science/article/pii/S0140988309001108>. doi:10.1016/j.eneco.2009.06.012.
- [46] R. Loulou, A. Lehtila, Stochastic Programming and Tradeoff Analysis in TIMES, 2016.
- [47] B. Chen, J. Wang, L. Wang, Y. He, Z. Wang, Robust Optimization for Transmission Expansion Planning: Minimax Cost vs. Minimax Regret, *IEEE Transactions on Power Systems* 29 (2014) 3069–3077. doi:10.1109/TPWRS.2014.2313841.
- [48] C. Chen, Y. P. Li, G. H. Huang, Y. Zhu, An inexact robust nonlinear optimization method for energy systems planning under uncertainty, *Renewable Energy* 47 (2012) 55–66. URL: <http://www.sciencedirect.com/science/article/pii/S0960148112002480>. doi:10.1016/j.renene.2012.04.007.
- [49] J. Zhong, Y. Cao, Y. Li, Y. Tan, Y. Peng, L. Cao, Z. Zeng, Distributed modeling considering uncertainties for robust operation of integrated energy system, *Energy* 224 (2021) 120179. URL: <https://www.sciencedirect.com/science/article/pii/S036054422100428X>. doi:10.1016/j.energy.2021.120179.
- [50] Y. Mu, C. Wang, Y. Cao, H. Jia, Q. Zhang, X. Yu, A CVaR-based risk assessment method for park-level integrated energy system considering the uncertainties and correlation of energy prices, *Energy* 247 (2022) 123549. URL:

- <https://www.sciencedirect.com/science/article/pii/S0360544222004522>.
doi:10.1016/j.energy.2022.123549.
- [51] M. Namakshenas, M. Pishvaei, Data Driven Robust Optimization, 2019, pp. 1–40.
- [52] K. G. H. Kong, B. S. How, S. Y. Teng, W. D. Leong, D. C. Foo, R. R. Tan, J. Sunarso, Towards data-driven process integration for renewable energy planning, Current Opinion in Chemical Engineering 31 (2021) 100665. URL: <https://www.sciencedirect.com/science/article/pii/S221133982030068X>. doi:10.1016/j.coche.2020.100665.
- [53] Z. Liu, Z. Guo, Q. Chen, C. Song, W. Shang, M. Yuan, H. Zhang, A review of data-driven smart building-integrated photovoltaic systems: Challenges and objectives, Energy 263 (2023) 126082. URL: <https://www.sciencedirect.com/science/article/pii/S0360544222029681>. doi:10.1016/j.energy.2022.126082.
- [54] W. Ma, Y. Zhang, J. Fan, X. Wu, G. Liu, An innovative data-driven energy planning framework for developing regions based on multi-objective optimization and multi-index comprehensive evaluation, Journal of Renewable and Sustainable Energy 14 (2022) 026303. URL: <https://doi.org/10.1063/5.0069966>. doi:10.1063/5.0069966.
- [55] M. Yin, K. Li, J. Yu, A data-driven approach for microgrid distributed generation planning under uncertainties, Applied Energy 309 (2022) 118429. URL: <https://www.sciencedirect.com/science/article/pii/S0306261921016561>. doi:10.1016/j.apenergy.2021.118429.
- [56] C. O. R. Energy, Impact of Oil Price on Offshore Wind, Technical Report, 2020. URL: <https://ore.catapult.org.uk/analysisinsight/impact-of-oil-price-on-offshore-wi>
- [57] X. Cao, Y. Xu, M. Li, Q. Fu, X. Xu, F. Zhang, A modeling framework for the dynamic correlation between agricultural sustainability and the water-land nexus under uncertainty, Journal of Cleaner Production 349 (2022) 131270. URL: <https://www.sciencedirect.com/science/article/pii/S0959652622009015>. doi:10.1016/j.jclepro.2022.131270.

Supplementary Material

How energy strategies are shaped by the correlation of uncertainties

Antonio F. Rodriguez-Matas^a, Carlos Ruiz^b, Pedro Linares^{a,c,d}, Manuel Perez-Bravo^a

^a*Instituto de Investigación Tecnológica, Universidad Pontificia Comillas, ICAI, Calle de Alberto Aguilera, 25, Madrid, 28015, Spain*

^b*Department of Statistics and UC3M-BS Institute for Financial Big Data (IFiBiD), University Carlos III of Madrid, Avenida de la Universidad, 30, Leganés, 28911, Spain*

^c*Center for Energy and Environmental Policy Research, Massachusetts Institute of Technology, E40-435 77 Massachusetts Ave., Cambridge, 02139, MA, USA*

^d*Energy Policy Research Group, University of Cambridge, Cambridge, UK*

Appendix A. A literature review of studies incorporating correlation between uncertainties in energy-related models

Table A.1. Literature review of studies incorporating correlation between uncertainties in energy-related models

Authors	Model	Correlation Methodology	Correlated Uncertainties	Application
W. Wang et al., 2021 [1]	Energy Hub (EH) Planning Model	Multidimensional parallelepiped interval model. A correlation coefficient is used to describe the correlation between two interval variables	RES (wind speed and light intensity) and demand response, through electricity price	Electric-Heat-Gas coupled energy system planning
Abdalla, Abu Adma, et al., 2020 [2]	GEP Model	Polyhedral uncertainty set based on the estimated correlation matrix	Uncertainty among different RES plants (Onshore wind, offshore wind, PV, CSP and Hydro)	Generation Expansion Planning (GEP). Egyptian electric system
Roldán et al., 2019 [3]	Two-stage adaptive RO model	Ellipsoidal uncertainty set relying on their variance-covariance matrix	Spatial correlations of RES and demand	Transmission network expansion planning. Spanish electric system

Continued on next page

Table A.1 – continued from previous page

Authors	Model	Correlation Methodology	Correlated Uncertainties	Application
Saxena et al., 2018 [4]	IEEE-30 bus system	A correlation matrix is used to apply Cholesky Decomposition to obtain random scenarios with correlation	Spatial correlations of load and generation (wind speed)	Coordinated Generation and Expansion planning
Dehghan et al., 2016 [5]	Garber 6-bus test system, IEEE 24-bus y IEEE 73-bus reliability test systems (RTS)	Bounded intervals, through a polyhedral uncertainty set	Demand and wind power generation	Expansion planning
Fu et al., 2021 [6]	Two-stage stochastic programming model	Copula function is introduced to get the joint probability distribution function	Energy demand and solar radiation	Integrated Energy Systems (IESs)
Qiu et al., 2019 [7]	-	Scenario generation method through Copula function	Wind farms generation in different locations	Power system with wind/ hydrogen production

Continued on next page

Table A.1 – continued from previous page

Authors	Model	Correlation Methodology	Correlated Uncertainties	Application
Zhu et al., 2020 [8]	Multi-energy complementary power generation system (MECP)	Copula-based interval full-infinite programming (CIFP) method	Wind and solar power generation binary joint distribution function	South China Sea island power system supply
L. Yu et al., 2020 [9]	CFIP-WEN model	Copula-based fuzzy interval-random programming method	Water resources availability and electricity consumption	Water-energy nexus system of Henan Province, China
Mu et al., 2022 [10]	Park-level integrated energy system (PIES) model	Copula function to construct the joint distribution function. Random scenarios considering correlation are generated with Monte Carlo	Natural gas and electricity prices	A grid-connected PIES in the USA

Continued on next page

Table A.1 – continued from previous page

Authors	Model	Correlation Methodology	Correlated Uncertainties	Application
S. Zhang et al., 2018 [11]	CCP-based multi-objective distributed generation planning model. Minimization of both cost and risk.	Pearson correlation coefficient matrix (normal distributed variables). Spearman rank correlation coefficient matrix (non-normal distributed variables)	Wind speed, light intensity and load demand	Distributed generation planning in distribution network
Zeng et al., 2021 [12]	Combined heat and power based multi-energy system model	Scenario-based stochastic programming formulation to explicitly capture the correlations among uncertainties	Customers' responsiveness, energy demand and RES generation	Optimal demand response in renewable-based energy systems
H. Yu et al., 2022 [13]	Triangle Splitting (TSA) bi-objective operation optimization model	Cholesky decomposition	Cooling demand, electric demand, and solar radiation	Community integrated energy systems (CIES) in China

Continued on next page

Table A.1 – continued from previous page

Authors	Model	Correlation Methodology	Correlated Uncertainties	Application
Q. Wang et al., 2022 [14]	Bayesian distributionally RO model	Copula function to obtain the joint probability function. Generation of low-dimensional scenario set	Wind and solar generation	Energy storage planning. Storage sizing model.
Abdalla, Smiece, et al., 2020 [15]	Two-stage robust GEP model	Polyhedral uncertainty set based on its variance-covariance matrix	Spatial and temporal correlations among different wind farm sites	Generation Expansion Planning
Cao et al., 2019 [16]	Chance-constrained optimization model	Correlation matrix.	Wind farms and load at different buses	Storage sizing model. Isolated grid application.

Continued on next page

Table A.1 – continued from previous page

Authors	Model	Correlation Methodology	Correlated Uncertainties	Application
Lei et al., 2020 [17]	Multi-objective bi-level stochastic model	Multi-dimensional correlated scenario sets (MDCS) generation method. Considers time sequence, autocorrelation y cross-correlation of RES and multi-energy loads.	Renewable energy and multi-energy loads	Expansion Planning. Regional integrated energy system (RIES). Yangzhong City (China).
Xu et al., 2020 [18]	Risk-averse two-stage stochastic optimization model	Ellipsoidal uncertainty sets. Minimum volume enclosing ellipsoid (MVEE) algorithm.	Power outputs of geographically-close wind farms	Integrated energy and reserve dispatch problem.
Patankar et al., 2022 [19]	Temoa	Robust optimization technique based on (Bertsimas & Sim, 2004), but incorporating temporal auto-correlation	Fuel costs and technology capital cost	U.S. decarbonization pathways

Appendix B. Case study calibration

The time-varying parameters are defined with initial values corresponding to the year 2020 and final values for the year 2030. Intermediate values within this period are determined using linear interpolation. This approach facilitates the modeling of learning curves for emerging technologies and the fluctuations in fuel prices driven by regulatory changes and variations in supply and demand. To account for changes in annual demand, an annual growth rate is applied. Hourly demand is then calculated using a load curve applied to the annual demand. In the following, the most significant parameters for this case study are defined. More information can be found on openMASTER’s GitHub webpage and on [20].

Primary energy	Fuel price [EUR/MWh]
Nuclear	2.88
Imported Coal	8
Natural Gas	18.4
Liquefied Natural Gas	37
Crude Oil	40
Hydro Run off the River	0
Hydro with Reservoir Capacity	0
Mihi Hydro	0
Wind Onshore	0
Wind Offshore	0
Solar Photovoltaic	0
Solar Thermoelectric	0
Solar Thermal	0
Biomass Energy Crops	21
Biomass Agriculture Waste	17
Biomass Forestry Waste	8
Solid Waste	21
Bioethanol Production Inputs	54
Biodiesel Production Inputs	46
Biogas	104

Table B.2. Fuel prices for primary energy vectors in EUR per MWh.

Energy Technologies	Investment Cost [EUR/kW]
Nuclear Power	4800
Imported Coal Traditional	1450
Imported Coal Integrated Gasification Combined Cycle	1950
Imported Coal Super-critical Pulverised Coal	1650
Imported Coal Super-critical Pulverised Coal with CCS	3400
Combined Cycle Gas Turbine Traditional	550
Combined Cycle Gas Turbine with CCS	1750
Open Cycle Gas Turbine Traditional	450
Open Cycle Gas Turbine with CCS	900
Fuel Oil Traditional	784
Hydro Run off the River	1715
Hydro with Reservoir Capacity	2100
Hydro with Pumping Storage	3804
Mini Hydro	1715
Wind Onshore	1300
Wind Offshore	2800
Solar Photovoltaic Centralised with Tracking	463
Solar PV Distributed w/o Tracking (Industrial Sector)	645
Solar PV Distributed w/o Tracking (Other Uses Sector)	645
Solar Thermoelectric Centralised	3000
Solar Thermal Distributed Industry	848
Solar Thermal Distributed Other Uses	848
Biomass Electricity Centralised	2517
Solid Waste	5503
Cogeneration in Industry (Natural Gas)	1425
Cogeneration in Other Uses (Natural Gas)	2093
Cogeneration in Industry (Biomass)	2137.5
Cogeneration in Other Uses (Biomass)	3139.5
Refinery Low Complexity	114
Refinery High Complexity	330
Refinery Very High Complexity	653
Bioethanol Production Plant	1040
Biodiesel Production Plant	510
Regasification Terminal	35

Table B.3. Investment costs for energy technologies in EUR per kW.

Table B.4. Previous installed capacity and conversion losses for different energy technologies.

Energy Technologies	Previous Installed Capacity [GW]	Conversion Losses [%]
Nuclear Power	7.4	0.62
Imported Coal Traditional	3.0	0.58
Imported Coal Integrated Gasification Combined Cycle	3.0	0.52
Imported Coal Super-critical Pulverised Coal	1.0	0.55
Imported Coal Super-critical Pulverised Coal with CCS	0.5	0.64
Combined Cycle Gas Turbine Traditional	26.6	0.42
Combined Cycle Gas Turbine with CCS	0.0	0.54
Open Cycle Gas Turbine Traditional	0.0	0.55
Open Cycle Gas Turbine with CCS	0.0	0.65
Fuel Oil Traditional	3.7	0.62
Hydro Run off the River	2.15	0.0
Hydro with Reservoir Capacity	12.0	0.0
Hydro with Pumping Storage	3.3	0.30
Mini Hydro	0.0	0.0
Wind Onshore	28.0	0.0
Wind Offshore	0.0	0.0
Solar Photovoltaic Centralised with Tracking	8.4	0.0
Solar Photovoltaic Distributed without Tracking (Industrial Sector)	0.0	0.0
Solar Photovoltaic Distributed without Tracking (Other Uses Sector)	0.0	0.0
Solar Thermoelectric Centralised	2.3	0.0
Solar Thermal Distributed Industry	0.0	0.0
Solar Thermal Distributed Other Uses	0.0	0.0
Biomass Energy Crops Centralised	0.32	0.61
Biomass Agriculture Waste Centralised	0.68	0.61
Biomass Forestry Waste Centralised	0.0	0.61
Solid Waste	0.7	0.61
Cogeneration in Industry (Natural Gas)	2.4	0.26
Cogeneration in Other Uses (Natural Gas)	2.4	0.27
Cogeneration in Industry (Biomass)	0.0	0.26

Table B.4. (continued)

Energy Technologies	Previous Installed Capacity [GW]	Conversion Losses [%]
Cogeneration in Other Uses (Biomass)	0.0	0.27
Refinery Low Complexity	62.2	0.07
Refinery High Complexity	24.3	0.09
Refinery Very High Complexity	0.4	0.17
Bioethanol Production Plant	0.4	0.0
Biodiesel Production Plant	6.7	0.01
Regasification Terminal	76.0	0.01

Appendix C. Correlation matrix for the case study

The correlation matrices utilized are presented in the following tables. These correlations have been calculated based on historical data from various sources and normalized using the z-score technique.

These sources include (i) BloombergNEF: investment costs of non-renewable energy technologies (nuclear, CHP, coal and gas-fired power plants), onshore and offshore wind, solar PV, and biomass power plants; (ii) IRENA renewable power generation costs 2022 report [21]: investment costs of hydroelectric technologies; (iii) ESA Atomic [22]: natural uranium price; (iv) MIBGAS [23]: natural gas and LNG prices; (v) Brent market [24]: crude oil price; (vi) AVEBIOM [25]: biomass price.

The data from BloombergNEF is subscription-based and not publicly available, so it is not shown in this work. The remaining sources can be consulted in the references provided.

Regarding the correlation levels between fossil fuel prices and renewable energy technology investment costs, the values of L in Table D.7. are adjusted by 0.5 for the positive correlation scenario and -0.5 for the negative correlation scenario.

References

- [1] W. Wang, H. Dong, Y. Luo, C. Zhang, B. Zeng, F. Xu, M. Zeng, An Interval Optimization-Based Approach for Electric–Heat–Gas Coupled Energy System Planning Considering the Correlation between Uncertainties, *Energies* 14 (2021) 2457. URL: <https://www.mdpi.com/1996-1073/14/9/2457>. doi:10.3390/en14092457, number: 9 Publisher: Multidisciplinary Digital Publishing Institute.
- [2] O. H. Abdalla, M. A. Abu Adma, A. S. Ahmed, Generation expansion planning under correlated uncertainty of mass penetration renewable energy sources, *IET Energy Systems Integration* 2 (2020) 273–281. URL: <https://onlinelibrary.wiley.com/doi/abs/10.1049/iet-esi.2020.0008>. doi:10.1049/iet-esi.2020.0008, eprint: <https://onlinelibrary.wiley.com/doi/pdf/10.1049/iet-esi.2020.0008>.
- [3] C. Roldán, R. Mínguez, R. García-Bertrand, J. M. Arroyo, Robust Transmission Network Expansion Planning Under Correlated Uncertainty, *IEEE Transactions on Power Systems* 34 (2019) 2071–2082. doi:10.1109/TPWRS.2018.2889032, conference Name: IEEE Transactions on Power Systems.
- [4] K. Saxena, R. Bhakar, P. Jain, Coordinated GEP and TEP Approach with Correlated Generation and Load, in: 2018 3rd International Conference and Workshops on Recent Advances and Innovations in Engineering (ICRAIE), 2018, pp. 1–6. doi:10.1109/ICRAIE.2018.8710415.
- [5] S. Dehghan, N. Amjady, A. J. Conejo, Reliability-Constrained Robust Power System Expansion Planning, *IEEE Transactions on Power Systems* 31 (2016) 2383–2392. doi:10.1109/TPWRS.2015.2464274, conference Name: IEEE Transactions on Power Systems.
- [6] Y. Fu, Q. Sun, R. Wennersten, The effect of correlation of uncertainties on collaborative optimization of integrated energy system, *Energy Reports* 7 (2021) 586–592. URL: <https://www.sciencedirect.com/science/article/pii/S235248472100593X>. doi:10.1016/j.egy.2021.07.130.
- [7] Y. Qiu, Q. Li, Y. Pan, H. Yang, W. Chen, A scenario generation method based on the mixture vine copula and its application in the power system with wind/hydrogen production, *International Journal of Hydrogen Energy* 44 (2019) 5162–5170. URL:

<https://www.sciencedirect.com/science/article/pii/S0360319918330994>.
doi:10.1016/j.ijhydene.2018.09.179.

- [8] Y. Zhu, Q. Tong, X. Yan, Y. Liu, J. Zhang, Y. Li, G. Huang, Optimal design of multi-energy complementary power generation system considering fossil energy scarcity coefficient under uncertainty, *Journal of Cleaner Production* 274 (2020) 122732. URL: <https://www.sciencedirect.com/science/article/pii/S0959652620327797>. doi:10.1016/j.jclepro.2020.122732.
- [9] L. Yu, Y. Xiao, S. Jiang, Y. P. Li, Y. R. Fan, G. H. Huang, J. Lv, Q. T. Zuo, F. Q. Wang, A copula-based fuzzy interval-random programming approach for planning water-energy nexus system under uncertainty, *Energy* 196 (2020) 117063. URL: <https://www.sciencedirect.com/science/article/pii/S0360544220301705>. doi:10.1016/j.energy.2020.117063.
- [10] Y. Mu, C. Wang, Y. Cao, H. Jia, Q. Zhang, X. Yu, A CVaR-based risk assessment method for park-level integrated energy system considering the uncertainties and correlation of energy prices, *Energy* 247 (2022) 123549. URL: <https://www.sciencedirect.com/science/article/pii/S0360544222004522>. doi:10.1016/j.energy.2022.123549.
- [11] S. Zhang, H. Cheng, K. Li, N. Tai, D. Wang, F. Li, Multi-objective distributed generation planning in distribution network considering correlations among uncertainties, *Applied Energy* 226 (2018) 743–755. URL: <https://www.sciencedirect.com/science/article/pii/S030626191830919X>. doi:10.1016/j.apenergy.2018.06.049.
- [12] B. Zeng, Y. Liu, F. Xu, Y. Liu, X. Sun, X. Ye, Optimal demand response resource exploitation for efficient accommodation of renewable energy sources in multi-energy systems considering correlated uncertainties, *Journal of Cleaner Production* 288 (2021) 125666. URL: <https://www.sciencedirect.com/science/article/pii/S0959652620357127>. doi:10.1016/j.jclepro.2020.125666.
- [13] H. Yu, W. Tian, J. Yan, P. Li, K. Zhao, F. Wallin, C. Wang, Improved triangle splitting based bi-objective optimization for community integrated energy systems with correlated uncertainties, *Sustainable Energy Technologies and Assessments* 49 (2022) 101682. URL:

<https://www.sciencedirect.com/science/article/pii/S2213138821006962>.
doi:10.1016/j.seta.2021.101682.

- [14] Q. Wang, X. Zhan, C. Yi, Z. Li, D. Xu, A Novel Shared Energy Storage Planning Method Considering the Correlation of Renewable Uncertainties on the Supply Side, *IEEE Transactions on Sustainable Energy* (2022) 1–1. doi:10.1109/TSTE.2022.3179837, conference Name: IEEE Transactions on Sustainable Energy.
- [15] O. H. Abdalla, L. Smieeee, M. A. A. Adma, A. S. Ahmed, Two-stage robust generation expansion planning considering long- and short-term uncertainties of high share wind energy, *Electric Power Systems Research* 189 (2020) 106618. URL: <https://www.sciencedirect.com/science/article/pii/S0378779620304223>. doi:10.1016/j.epsr.2020.106618.
- [16] M. Cao, Q. Xu, J. Cai, B. Yang, Optimal sizing strategy for energy storage system considering correlated forecast uncertainties of dispatchable resources, *International Journal of Electrical Power & Energy Systems* 108 (2019) 336–346. URL: <https://www.sciencedirect.com/science/article/pii/S0142061518324773>. doi:10.1016/j.ijepes.2019.01.019.
- [17] Y. Lei, D. Wang, H. Jia, J. Chen, J. Li, Y. Song, J. Li, Multi-objective stochastic expansion planning based on multi-dimensional correlation scenario generation method for regional integrated energy system integrated renewable energy, *Applied Energy* 276 (2020) 115395. URL: <https://www.sciencedirect.com/science/article/pii/S0306261920309077>. doi:10.1016/j.apenergy.2020.115395.
- [18] X. Xu, Z. Yan, M. Shahidehpour, Z. Li, M. Yan, X. Kong, Data-Driven Risk-Averse Two-Stage Optimal Stochastic Scheduling of Energy and Reserve With Correlated Wind Power, *IEEE Transactions on Sustainable Energy* 11 (2020) 436–447. doi:10.1109/TSTE.2019.2894693, conference Name: IEEE Transactions on Sustainable Energy.
- [19] N. Patankar, H. Eshraghi, A. R. de Queiroz, J. F. DeCarolis, Using robust optimization to inform US deep decarbonization planning, *Energy Strategy Reviews* 42 (2022) 100892. URL: <https://www.sciencedirect.com/science/article/pii/S2211467X22000888>. doi:10.1016/j.esr.2022.100892.

- [20] A. F. Rodríguez-Matas, M. Pérez-Bravo, P. Linares, J. C. Romero, openMASTER: The open source Model for the Analysis of Sustainable Energy Roadmaps, *Energy Strategy Reviews* 54 (2024) 101456. URL: <https://www.sciencedirect.com/science/article/pii/S2211467X24001639>. doi:10.1016/j.esr.2024.101456.
- [21] IRENA, Renewable Power Generation Costs in 2022, Technical Report, 2023. URL: <https://www.irena.org/Publications/2023/Aug/Renewable-Power-Generation-Costs>
- [22] European Commission, EU natural uranium price: ESA indices since 1980 - European Commission, 2024. URL: https://euratom-supply.ec.europa.eu/eu-natural-uranium-price-esa-indices-1980_en. *Mercado Ibérico del Gas*, 2024. URL: <https://www.mibgas.es/es>.
- [23] Nasdaq, Brent Crude Price: Latest Futures Prices, Charts & Market News | Nasdaq, 2024. URL: <https://www.nasdaq.com/market-activity/commodities/bz-nmx>.
- [25] AVEBIOM, Índice de Precios de Biomasa, 2024. URL: <https://www.avebiom.org/proyectos/indice-precios-biomasa-al-consumidor>.